


DIGITAL MULTIMETER

DM-830LN

HTC
HAZARI TECH CONNECT

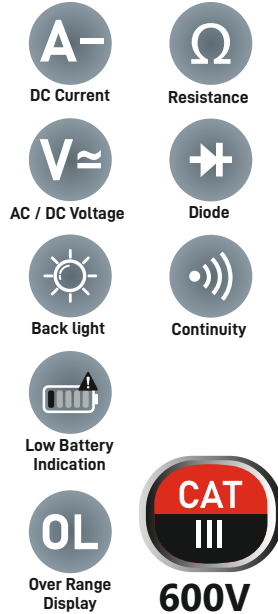

FEATURES :

- 3½ DIGIT MANUAL MULTIMETER
- 1,999 COUNT
- DATA HOLD
- BATTERY TEST
- MAX / MIN HOLD
- AUTO POWER OFF
- POCKET SIZE

DC VOLTAGE

RANGE	RESOLUTION	ACCURACY
200mV	0.1mV	±0.5% of rdg ±3 digits
2V	0.001V	
20V	0.01V	
200V	0.1V	
600V	1V	

DC CURRENT

RANGE	RESOLUTION	ACCURACY
20mA	0.01mA	±1.2% of rdg ±3 digits
200mA	0.1mA	
10A	0.01A	

AC VOLTAGE

RANGE	RESOLUTION	ACCURACY
200V	0.1V	±1.2% of rdg ±5 digits
600V	1V	

RESISTANCE

RANGE	RESOLUTION	ACCURACY
200Ω	0.1Ω	±1.0% of rdg ±3 digits
2kΩ	0.001kΩ	
20kΩ	0.01kΩ	
200kΩ	0.10kΩ	±1.5% of rdg ±3 digits
2MΩ	0.001MΩ	
20MΩ	0.01MΩ	

POWER : AAA 1.5V x 2

Dimension	: H151 x W75 x D48 mm
Weight	: Approx. 220 gms.
Accessories	: Test leads, User Manual & Battery.
Qty	: 60 Pcs. in a Box.