


DIGITAL MULTIMETER

DM-88

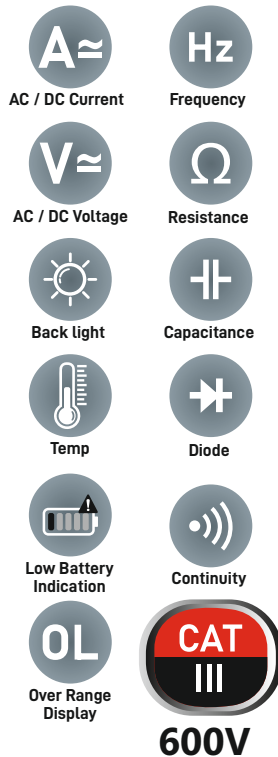

FEATURES :

- 3½ DIGIT MULTIMETER
- 3,999 COUNT
- hFE TEST
- COMS, TTL LOGIC TEST
- TRUE RMS
- DUTY CYCLE
- AUTO POWER OFF



DC VOLTAGE

RANGE	RESOLUTION	ACCURACY
400mV	0.1 mV	±0.5% of rdg ±4 digits
4V	1mV	
40V	10mV	
400V	100mV	
1000V	1V	±1.0% of rdg ±4 digits

DC CURRENT

RANGE	RESOLUTION	ACCURACY
400µA	0.01µA	±1.0% of rdg±5 digits
4000µA	1µA	
40mA	10µA	
400mA	100µA	
4A	1mA	±2.0% of rdg±5 digits
20A	10mA	

CAPACITANCE

RANGE	RESOLUTION	ACCURACY
4nF	1pF	±5.0% of rdg±8 digits
40nF	10pF	
400nF	100pF	±3.5% of rdg±8 digits
4µF	1nF	
40µF	10nF	
200µF	100nF	±5.0% of rdg±8 digits

AC VOLTAGE

RANGE	RESOLUTION	ACCURACY
400mV	0.1 mV	±1.5% of rdg ±15 digits
4V	1mV	
40V	10mV	±0.8% of rdg ±6 digits
400V	100mV	
750V	1V	±1.0% of rdg ±6 digits

AC CURRENT

RANGE	RESOLUTION	ACCURACY
400µA	0.01µA	±1.5% of rdg±5 digits
4000µA	1µA	
40mA	10µA	
400mA	100µA	
4A	1mA	±2.0% of rdg±10 digits
40A	10mA	

FREQUENCY

RANGE	RESOLUTION	ACCURACY
10Hz	0.01Hz	±0.5% of rdg±4 digits
100Hz	0.001Hz	
1000Hz	1Hz	
10kHz	10Hz	
100kHz	100Hz	
1MHz	1Hz	
10MHz	10kHz	

RESISTANCE

RANGE	RESOLUTION	ACCURACY
400Ω	0.1Ω	±0.8% of rdg±5 digits
4kΩ	1Ω	
40kΩ	10Ω	±0.8% of rdg±1 digits
400kΩ	100Ω	
4MΩ	1kΩ	±1.2% of rdg±5 digits
40MΩ	10kΩ	

LOGIC TEST

RANGE	RESOLUTION	ACCURACY
TTL LOGIC	▲	>2.5V ±0.8V
	▼	<0.8V ±0.5V
CMOS LOGIC	▲	>4.0V ±1.0V
	▼	<2.0V ±0.5V

TEMPERATURE

RANGE	RESOLUTION	ACCURACY
(-40~1000)°C	<400°C±1% of rdg±5 digits	1°C
	>400°C±1.5% of rdg±15 digits	

POWER : AAA 1.5V x 2

Dimension	: H170 x W86 x D35 mm
Weight	: Approx. 290 Gsm.
Accessories	: Test leads, Manual TP04 Temperature Probe & Battery.
Qty	: 30 Pcs. in a Box.