


DIGITAL MULTIMETER

DM-92

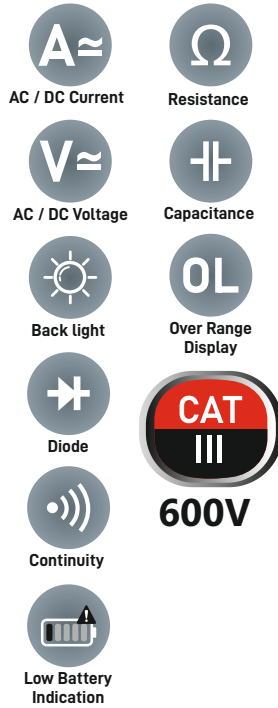

FEATURES :

- 3½ DIGIT MANUAL MULTIMETER
- 1,999 COUNT
- hFE TEST
- DATA HOLD
- AUTO POWER OFF
- FULL PROTECTION IN ALL RANGE

DC VOLTAGE

RANGE	RESOLUTION	ACCURACY
200mV	0.1 mV	±0.5% of rdg ±3 digits
2V	1mV	
20V	10mV	
200V	100mV	
1000V	1V	±1.0% of rdg ±3 digits

DC CURRENT

RANGE	RESOLUTION	ACCURACY
200µA	0.1µA	±0.8% of rdg±3 digits
2mA	1µA	
20mA	10µA	
200mA	100µA	±1.2% of rdg±4 digits
20A	10mA	±2.0% of rdg±5 digits

TRANSISTOR hFE TEST

RANGE	TEST RANGE	TEST CURRENT/VOLTAGE
NPN or PNP	0-1000	1b=10µF/VCE=3A

SPECIAL FUNCTION :

Continuity Buzzer : Approx. <300Ω+10Ω

Sampling Rate : 3 Times per second

AC Frequency Response : 40~400Hz

Low Battery Indication : <7.5V

Auto Power Off : Approx. 30 Min.

AC VOLTAGE

RANGE	RESOLUTION	ACCURACY
2V	1mV	±0.8% of rdg ±5 digits
20V	10mV	
200V	100mV	
750V	1V	±1.2% of rdg ±5 digits

AC CURRENT

RANGE	RESOLUTION	ACCURACY
20mA	10µA	±1.0% of rdg±5 digits
200mA	100µA	±2.0% of rdg±5 digits
20A	10mA	±3.0% of rdg±10 digits

RESISTANCE

RANGE	RESOLUTION	ACCURACY
200Ω	0.1Ω	±0.8% of rdg±5 digits
2kΩ	1Ω	
20kΩ	10Ω	±0.8% of rdg±3 digits
200kΩ	100Ω	
2MΩ	1kΩ	±1.0% of rdg±15 digits
20MΩ	10kΩ	
200MΩ	100kΩ	±5.0% of rdg-10 digits±20 digits

CAPACITANCE

RANGE	RESOLUTION	ACCURACY
20nF	10pF	±2.0% of rdg±20 digits
200nF	100pF	
2µF	1nF	
200µF	100nF	±2.5% of rdg±20 digits

POWER : 9V (6F22) X 1

Dimension	: H185 x W93 x D35 mm
Weight	: Approx. 290 Gms.
Accessories	: Test leads, User Manual & Battery.
Qty	: 30 Pcs. in a Box.