


DIGITAL TACHOMETER

Model : DT-2236

ISO-9001, CE, IEC1010

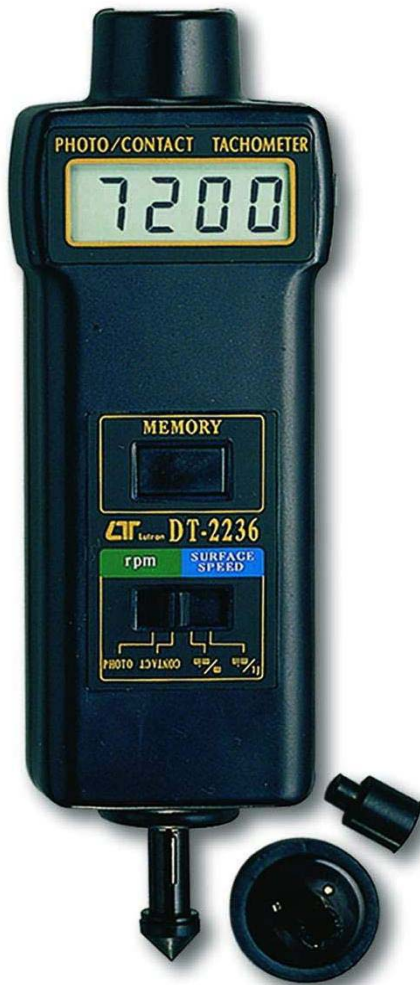

FEATURES

- * World's patent, Multi-functions, one instrument combine Photo Tachometer (RPM) and Contact Tachometer (RPM, m/min., ft/min.).
- * Wide measuring range :
0.5 to 100,000 RPM.
- * < 1,000 RPM, 0.1 RPM resolution .
- * High precision with 0.05% accuracy.
- * Memorize the last value, max., value, min. value
- * High visible LCD display.
- * Exclusive one chip LSI circuit & crystal time base
- * The use of durable, long lasting components, including a strong, light weight ABS plastic housing, assures almost maintenance free performance for many years.



LUTRON ELECTRONIC

The Art of Measurement

DIGITAL PHOTO/CONTACT TACHOMETER

Model : DT-2236

FEATURES	
* World's patent, Multi-functions, one instrument combine Photo Tach.(RPM) & Contact Tach. (RPM, m/min., ft/min.).	* High visible LCD display gives RPM reading exactly with no guessing or errors & saves battery energy.
* Wide measuring range from 0.5 to 100,000 RPM.	* This tachometer used the exclusive one chip MICRO-COMPUTER LSI circuit & crystal time base, offer the high accurate measurement & fast sampling time.
* 0.1 RPM resolution for the measured value < 1000 RPM.	
* High precision with 0.05% accuracy.	* The use of durable, long lasting components, including a strong, light weight ABS plastic housing, assures almost maintenance free performance for many years.
* The last value, max., value, min. value will be stored into the memory automatically & can be obtained by pressing MEMORY CALL BUTTON.	
	* The housing cabinet has been carefully shaped to fit comfortable in either hand.

SPECIFICATIONS			
Measurement & Range	<i>Photo Tachometer :</i> 5 to 99,999 RPM.	Operating Humidity	Less than 80% R.H.
	<i>Contact Tachometer :</i> 0.5 to 19,999 RPM.	Memory	Last/Max./Min. value.
	<i>Surface Speed :</i> m/min. - 0.05 to 1,999 m/min. ft/min. - 0.2 to 6,560 ft/min.	Battery	4 x 1.5V AA (UM-3) batteries.
Resolution	<i>RPM:</i> 0.1 RPM (< 1,000 RPM). 1 RPM (≥ 1,000 RPM).	Power Consumption	<i>Photo type :</i> Approx. DC 44 mA.
	<i>m/min.:</i> 0.01 m/min. (< 100 m/min.). 0.1 m/min. (≥ 100 m/min.). 1 m/min. (≥ 1000 m/min.).	Size	<i>Contact type :</i> Approx. DC 8 mA.
	<i>ft/min.:</i> 0.1 ft/min. (< 1,000 ft/mn.). 1 ft/min. (≥ 1,000 ft/mn.).	Weight	195 x 61 x 38.5 mm. (7.6 x 2.4 x 1.5 inch).
Display	5 digits, 10 mm (0.4") LCD.	Accessories Included	211 g (0.46 LB) * without batteries.
Accuracy	±(0.05% + 1 digit).		Carrying case..... 1 PC.
Time base	Quartz crystal.		Reflecting tape marks (600 mm)..... 1 PC.
Circuit	Exclusive one-chip of microcomputer LSI circuit.		RPM adapter (CONE) 1 PC.
Operating Temp.	0 - 50 °C (32 - 122 °F).		RPM adapter (FUNNEL) 1 PC.
			Surface speed test wheel 1 PC.
			Operation manual..... 1 PC.

Photo Tachometer detecting distance	50 to 150 mm/2 to 6 inch. (typical max. 300 mm/12 inch, depending upon ambient light). *Spec. of detecting distance are that under the size of reflecting tape is 10 mm square & the measuring RPM value is 1,800 RPM. The max. & min. detecting distance may change under different environment, different reflecting tape or the measuring RPM beyond 1800 RPM.
-------------------------------------	--

* Appearance and specifications listed in this brochure are subject to change without notice. 1908-DT2236