


DIGITAL AC/DC 1000A CLAMP METER

CM-2056

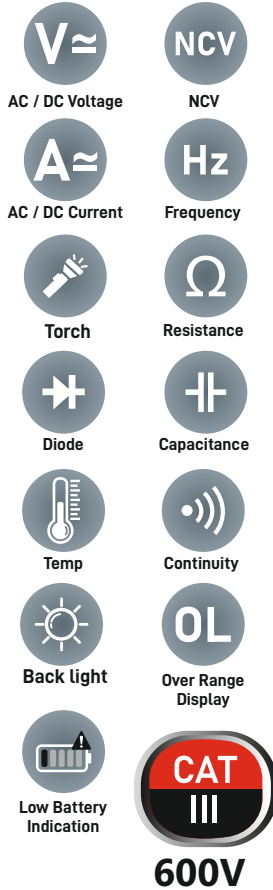

FEATURES :

- 3 $\frac{3}{4}$ DIGIT
- 3,999 COUNT
- JAW OPEN : 52 MM WITH LIGHTING
- AUTO POWER OFF (APO)
- TRUE RMS
- MAX/MIN VALUES WITH DATA HOLD

DC VOLTAGE

RANGE	RESOLUTION	ACCURACY
400mV	0.1mV	±1.0% of rdg ±5 digits
4V	1mV	±0.5% of rdg ±5 digits
40V	10mV	
400V	100mV	
1000V	1V	±1.0% of rdg ±5 digits

DC CURRENT

RANGE	RESOLUTION	ACCURACY
40A	0.01A	±1.5% of rdg ±5 digits
400A	0.1A	
1000A	1A	

FREQUENCY/DUTY

RANGE	RESOLUTION	ACCURACY
10Hz	0.01 Hz	±0.5% of rdg ±4 digits
100Hz	0.1Hz	
1kHz	1Hz	
10kHz	10Hz	
100kHz	100Hz	
1MHz	1kHz	
10MHz	10kHz	

AC VOLTAGE

RANGE	RESOLUTION	ACCURACY
4V	1mV	±0.8% of rdg ±5 digits
40V	10mV	
400V	100mV	
750V	1V	±1.0% of rdg ±5 digits

AC CURRENT

RANGE	RESOLUTION	ACCURACY
40A	0.01A	±1.5% of rdg ±5 digits
400A	0.1A	
1000A	1A	

CAPACITANCE

RANGE	RESOLUTION	ACCURACY
4nF	1pF	±5.0% of rdg ±10 digits
40nF	10pF	±2.5% of rdg ±5 digits
400nF	100pF	
4μF	1nF	
40μF	10nF	±5.0% of rdg ±10 digits
400μF	100nF	
4mF	1μF	
40mF	10μF	

RESISTANCE

RANGE	RESOLUTION	ACCURACY
400Ω	0.1Ω	±0.8% of rdg ±5 digits
4kΩ	1Ω	±0.8% of rdg ±1 digits
40kΩ	10Ω	
400kΩ	100Ω	
4MΩ	1kΩ	±1.0% of rdg ±5 digits
40MΩ	10kΩ	

TEMPERATURE

RANGE	RESOLUTION	ACCURACY
-40~1000°C	1°C	<400°C ±(1.0% +5) digit ≥400°C ±(1.5% +15) digit
0~1832°F	1°F	<750°F ±(1.0% +5) digit ≥750°F ±(1.5% +15) digit

POWER : 1.5V AAA x 2

Dimension	: H270 x W123 x D35 mm
Weight	: Approx. 280 g.
Accessories	: Test leads, Manual, TP04 Thermocouple, Carrying Bag & Battery
Qty	: 30 Pcs. in a Box